


FLUSH PUSHING F300

Not reversible

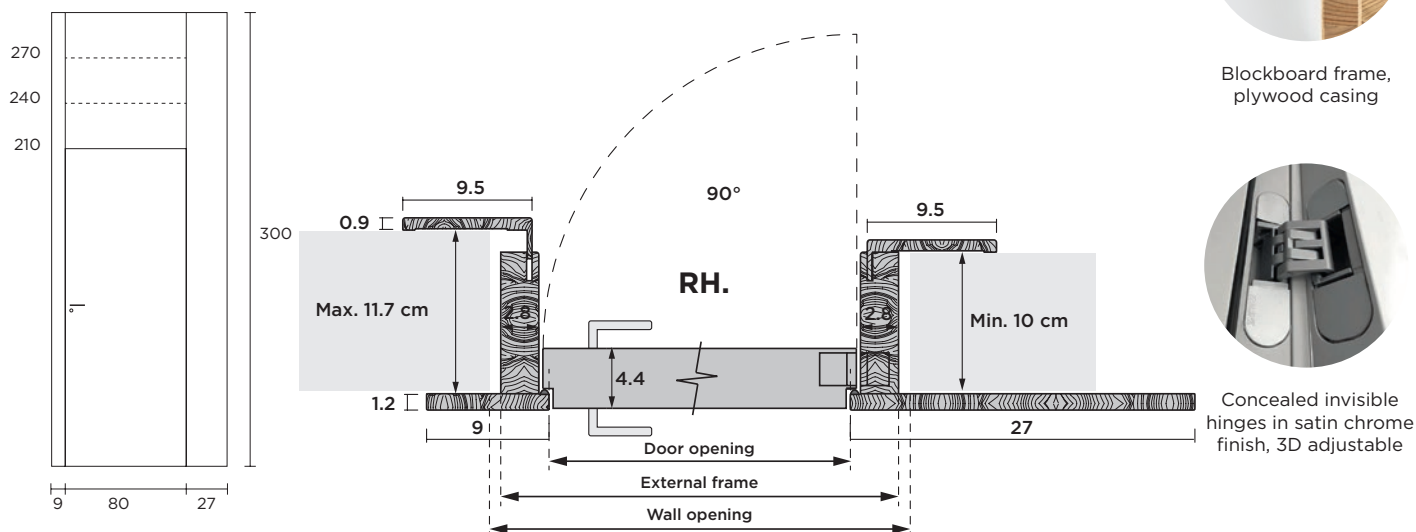

DIMENSIONS STANDARD

	Widths					Heights		Thickness	
Wall opening	70	80	85	90	100	205	215	7	10
External frame	68	78	83	88	98	204	214	7	10
Door opening	60	70	75	80	90	200	210	7	10

PANEL

44 mm thickness hollow core panel, finger joint fir wood perimeter frame with inner honeycomb core. Panel with stop moulding on three sides, edge-finished on four sides. Lacquered finish.

FRAME

Made of 28 mm thickness blockboard. Lacquered finish.

WOOD PANEL COVER PROFILES

Made of plywood, thickness 12x90 x H 3000 mm flat coplanar non-adjustable on hinge side, thickness 9x95x30 mm telescopic. with telescopic range 17 mm, on one side only. MDF wood panel thickness 12 x H 3000 mm on coplanar side only which can be produced with custom reductions in centimetres. Interchangeable wood panel system with application to wall with silicone. Lacquered finish.

- can only be used for the Vera lacquered collection.
- smooth lacquered wood panel (not needed)

OPENINGS 90°

Right and left.
Coplanar side to push.

HARDWARE


Concealed invisible hinges in satin chrome finish, 3D adjustable.

DOOR LOCK

Mediana magnetic lock with endcoding key "11", matt chrome finish with Venusdesign logo for swing version.

GASKETS

Perimetric gasket on three sides, matching with texture effect, interior in Acoustic Memory Foam.

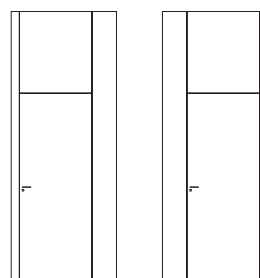

Interchangeable wood panel