


MINIMAL **F50**
Not reversible



Blockboard frame,
plywood casing

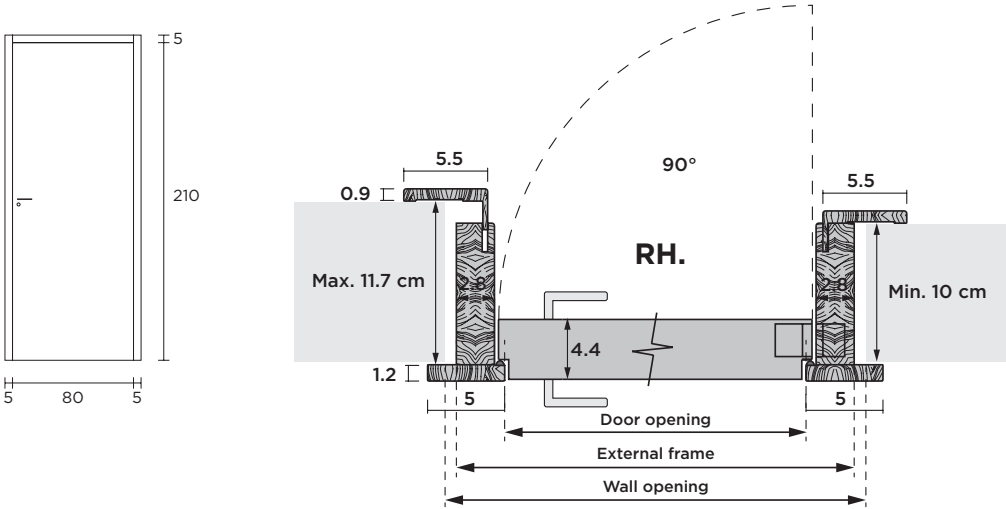

Concealed invisible
hinges in satin chrome
finish, 3D adjustable

DIMENSIONS STANDARD

	Widths					Heights		Thickness	
Wall opening	70	80	85	90	100	205	215	7	10
External frame	68	78	83	88	98	204	214	7	10
Door opening	60	70	75	80	90	200	210	7	10

PANEL

44 mm thickness hollow core panel, finger joint fir wood perimeter frame with inner honeycomb core. Panel with stop moulding on three sides, edge-finished on four sides. Lacquered finish.

FRAME

Made of 28 mm thickness blockboard. Lacquered finish.

COVER PROFILES

Made of plywood, thickness 12x50 mm flat coplanar non-adjustable on hinge side, thickness 9x55x30 mm telescopic. Telescopic range 17 mm on one side only. Lacquered finish.

N.B: can only be used for the Vera lacquered collection.

OPENINGS 90°

Right and left.
Coplanar side to push.

HARDWARE

Concealed invisible hinges in satin chrome finish, 3D adjustable.

DOOR LOCK

Mediana magnetic lock with endcoding key “11”, matt chrome finish with Venusdesign logo for swing version.

GASKETS


Perimetric gasket on three sides, matching with texture effect, interior in Acoustic Memory Foam.

FRAMEWORK FOR INTERNAL WALL SLIDING DOOR

Made of wood and mdf, available for metal counterframe widths from 100 - 125 - 150 mm, with telescopic cover profiles on both sides in plywood.

INSTALLATION INSTRUCTIONS

Wall/plasterboard opening -1 compared to standard measurements. Example: 90x215 cm opening = 89x214 cm.



To avoid visual imperfections, if there is a sub-frame, we recommend using plaster mesh and tile adhesive to cover the corners.